


GIULIETTA NEW



MODEL	WIDTH (L)	HEIGHT (H)	DEPTH (G)	CONNECTION			OUTPUT			HEATING ELEMENT POWER
				TYPE	DISTANCE / PITCH	SPACING BETWEEN CONNECTOR AND WALL (g)	55/45/20 °C	75/65/20° C	90/70/20 °C	
							mm	mm	mm	W
<b>GLTN-40/90</b>	400	930	118-128	<b>BOTTOM</b>	50	68-78	180	<b>337</b>	421	300
<b>GLTN-40/120</b>	400	1 230					231	<b>433</b>	542	400
<b>GLTN-40/170</b>	400	1 730					316	<b>598</b>	751	600
<b>GLTN-50/90</b>	500	930					211	<b>395</b>	494	400
<b>GLTN-50/120</b>	500	1 230					270	<b>508</b>	636	600
<b>GLTN-50/170</b>	500	1 730					371	<b>702</b>	881	600
<b>GLTN-60/90</b>	600	930					241	<b>450</b>	562	400
<b>GLTN-60/120</b>	600	1 230					308	<b>578</b>	724	600
<b>GLTN-60/170</b>	600	1 730					422	<b>799</b>	1003	900

The radiator can be mounted on the left and right side.

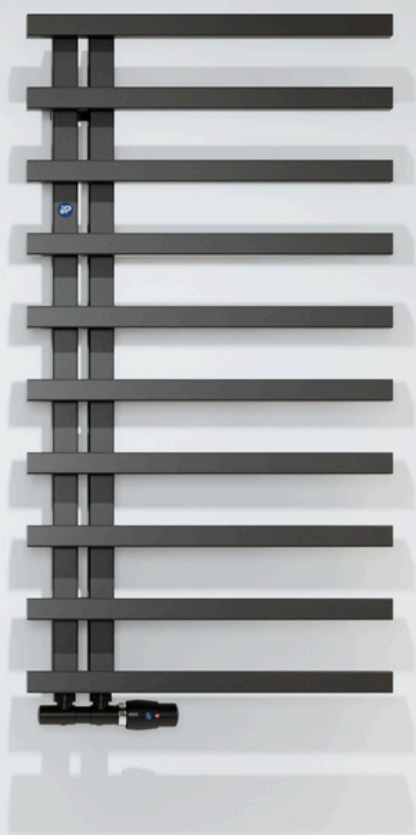

High thermal efficiency



Easy installation



# GIULIETTA NEW [GLTN]

## CONNECTION

**CONNECTION** bottom, pitch 50mm

## CONSTRUCTION

**MANIFOLD** 35x35 mm

**TUBE/PROFILE** 30x30 mm

**MATERIAL** selected precision steel

**SURFACE** paint coating

## WORKING PARAMETERS

**MAX. WORKING PRESSURE** 1,0 MPa

**MAX. WORKING TEMPERATURE** 95°C

## OTHER

**COLORS** The radiator is available in all colours from the palette INSTAL PROJEKT

**SET** radiator, mounting brackets, air vent, manual, warranty card, packaging


**DEDICATED ACCESSORIES** Z13, Z14, Z15, Z16



## MODERN DESIGN

Asymmetric construction with stylish and striking flat cross profiles that ensure functional use of the radiator.



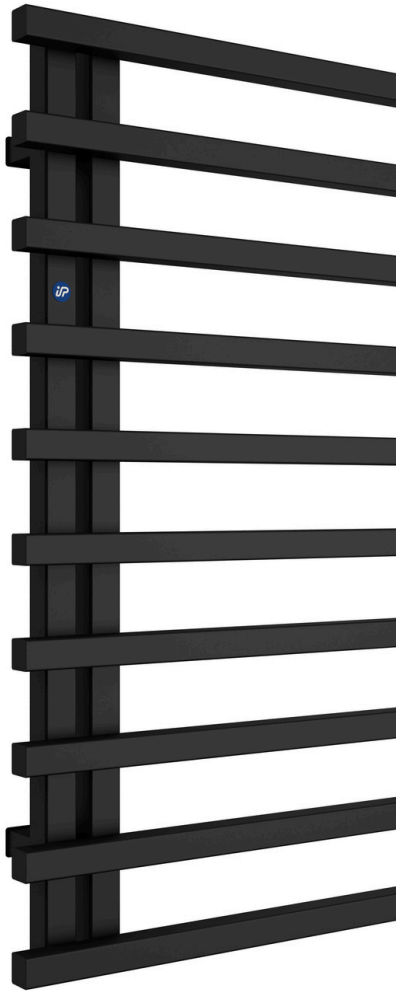

[GLTN-50/90C31]



[GLTN-50/90]